



# Designer Manufacturer

## CPI 3

Industrial Protection Cabinet with three compartments

*Designed to house a complete computer workstation: LCD monitor, base unit, printer and keyboard*

### Characteristics

- The body consists of a single thermoplastic unit so that the front and sides are part of the same structure;
- Access to both upper compartments via PMMA doors (transparent thermoplastic) - 6mm thick
- 10 mm thick extruded composite panels;
- 19 mm thick extruded composite panels for rear and floor of cabinet;
- Smooth cabinet surfaces, no tight corners to facilitate cleaning and prevent the build-up of dust;
- Cabinet can be attached to the wall (without supports).
- Two ventilators with grilles and filters to cool the cabinet;
- 80 mm cable gland in the right hand side panel;
- The three compartments are independent: cables pass through an opening in the screen/printer shelf;
- Upper compartments protected by compression latches: PMMA doors held in place against a seal located within the frame;

### Monitor & Base Unit compartment

- Access is via door fitted with polyamide hinges

### Printer compartment

- Access is via door fitted with polyamide hinges
- Sliding shelf fitted to triple extending rails in stainless steel, capable of handling loads of up to 60 kg, allowing the printer to be pulled fully free.

### Keyboard compartment

- Access by flap in transparent 6 mm PMMA on two polyamide hinges;
- Latch closure;
- PVC 19mm extending shelf on two stainless steel, double extending slides.

- Advantages:**
- Ergonomically designed cabinet
  - Reduced footprint
  - Permanent protection




### CPI 3 DIMENSIONS (mm):

External dimensions	W 600 x D 600 x H 1070 mm
Internal (screen/base unit)	W 580 x D 560 x H 475 mm
Internal (printer)	W 520 x D 560 x H 390 mm
Internal (keyboard)	W 470 x D 390 x H 80 mm



CPI with shelf for keyboard extended

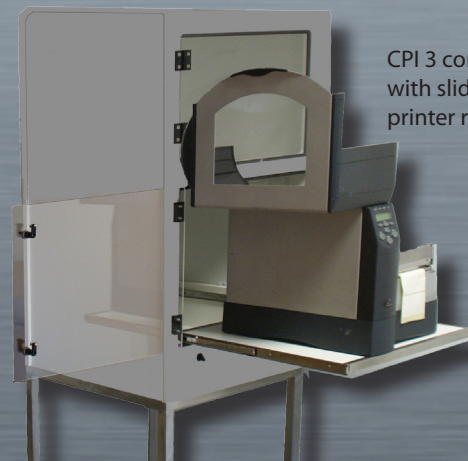

CPI 3 complete with sliding shelf printer removed



# Fixed and mobile workstations

## DESCRIPTION OF OPTIONS

### 1: Cabinet: 3 compartments

TAV L12 slot



#### LABEL SLOT option

- TAV: Inspection port in unbreakable polycarbonate Available in two sizes:
  - TAV L 12: W 220 x H 100 mm;
  - TAV L 24: W 220 x H 190 mm;



#### Option KDL:

- Opening cable gland system designed to allow cables to be connected without having to remove their end pieces;
- The gable glands are in two sections which hold the cables in leaktight seals;
- Usually fitted into one of the side walls of the cabinet.



#### STAINLESS STEEL LEGS option

- Painted steel in RAL 7035 grey;
- Mechanically welded assembly.

#### PRESSURE REDUCER option

- Cabin connected to a dry air system using a pressure reducing valve used to over-pressurize the cabinet to prevent the ingress of any particles, dust, etc.



Option  
PRESSURE-RELIEF VALVE

#### ECA option

- Fan fitted behind the grille, with filter, used to remove heat energy from the cabinet.



#### Additional options:

- Additional shelving;
- IP 66 waterproof mouse and keyboard;
- etc.

LM REALISATIONS S.A.S

ZI du Bas Pontet - 19, rue Jules Ferry - 69360 Saint Symphorien d'Ozon - FRANCE  
Tel. 33 (0)4 78 02 84 93 - Fax 33 (0)4 78 02 17 03 - [infos@lm-realisations.fr](mailto:infos@lm-realisations.fr)

[www.lm-realisations.com](http://www.lm-realisations.com)